


## Signal Generator / Counter

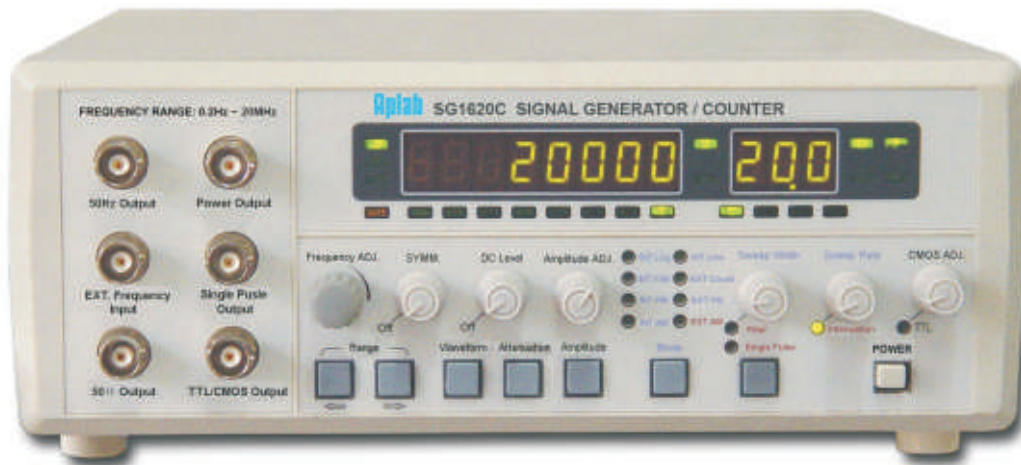

Aplab SG1600C series of signal-waveform generators are precision instrument to produce waveform like, Sine, Square, Triangle, Sweep, Pulse etc. Waveforms with varieties of modulation mode like AM, FM, FSK makes it ideal equipment for bench & laboratory testing making it popular among electronic engineers, scientist and in the field of education, production etc. Ergonomically designed front panel allows easy access to all the controls. Internal AM, FM, FSK make it easy to modulate waveform without the need of external source. It also has built in Frequency Counter upto 100MHz. The high reliability of the instrument is achieved by MSI and LSI with other high grade components and careful design to make it most stable and lowest distortion signal generator in its class. These signal generators come with optional Interface through RS232/USB.

### FEATURES

- LSI Circuitry, SMT Technology, Portable
- High Reliability : MTBF >10000 Hrs.
- Simultaneous Frequency (5 Digit) and Amplitude (3 Digit) Display
- Frequency Range : 0.2 Hz~3MHz (**SG1603C**), 0.2 Hz~10 MHz (**SG1610C**), 0.2 Hz~20 MHz (**SG1620C**)
- Output Level : 10Vp-p (50 ohms), 20Vp-p (Open Circuit), Fully Protected
- 7 Types of Waveforms : Sine, Square, Triangle, TTL, CMOS, Pulse, and Sweep
- Duty-Factor Variable : 20%-80%
- Triangle Linearity : >90%
- DC-Offset : -5V ~ +5V (50 Ohms), -10V ~ +10V (Open Load)
- Rise-Time : <20 nsec
- Sine Distortion : <1%
- Output Impedance : 50 Ohms, for TTL/CMOS 600 Ohms
- Output Attenuation : 0dB / 20dB / 40dB / 60dB
- External Frequency Counter : 0.2Hz~100MHz
- Single Pulse Output
- Frequency Stability :  $\pm 0.1\%$  / min (Warm up time 15 min)
- Modulation Modes : AM /FM (Int/Ext), FSK, PWM, PAM etc.
- RS232/485 Interface (Optional)
- VCF Facility

## Technical Specifications

	SG 1603C	SG 1610C	SG1620C
<b>Output Frequency</b>	0.2Hz ~3 MHz	0.2Hz ~10MHz	0.2Hz ~20 MHz
<b>Variable Decade Ranges</b>	7	8	8
<b>Output Impedance</b>	50 Ohms, TTL / CMOS SYNC 600 Ohms.		
<b>Output Waveform</b>	Sine, Square , Triangle and Sweep, Pulse, CMOS, TTL, FSK, AM, FM.		
<b>Output Display</b>	5 digit (10.000Hz ~ 20000KHz), 4 digit (0.200Hz ~ 9.999Hz)		
<b>Output Amplitude</b>	20Vp-p $\pm$ 10% max. (open load) 10Vp-p into 50 Ohms.		14V p-p $\pm$ 10% max. (open load) 7 Vp-p into 50 Ohms.
<b>Synchronous Output</b>	Pulse , TTL, CMOS		
TTL	TTL level, "0" level <0.8V, "1" level 3.5V across 600 Ohms.		
CMOS	CMOS Level for Freq. < 2MHz "0" level < 4.5V, "1" level 5V ~ 13.5V adjustable.		
Single Pulse	"0" level <0.5V, "1" level >3.5V.		
Reverse Voltage Protection	$\pm$ 30V at test condition with DC level to "OFF".		
<b>Amplitude Display</b>	3 digits with automatically positioned decimal point.		
Display Unit	Vp-p or mVp-p, Vrms or mVrms.		
Display Error	$\pm$ 20% +1 digit.		
<b>DC Off-Set</b>	-5V ~ +5V $\pm$ 10% in to 50 Ohms, -10V ~ +10V $\pm$ 10% in Open Load.		
<b>Attenuation</b>	0dB, 20dB, 40dB and 60dB.		
<b>Duty Cycle / Symmetry</b>	20% ~ 80% adjustable.		
<b>VCF Input</b>	0 ~ 2V.		
<b>Internal Sweep</b>			
Sweep Mode	Linear / Log.		
Sweep Time	10 msec ~ 5sec, $\pm$ 10%.		
Sweep Width	>1 Full Frequency Range.		
<b>Internal Modulation</b>			
FSK	Freq. : 1 KHz., Freq Offset : 0 ~ $\geq$ 5%.		
FM	Internal Freq. : 1KHz, Freq. Range : 0 ~ 5%.		
AM	Internal : Frequency 1KHz, Depth : 0 ~ 100% $\pm$ 5%.		
<b>External Modulation</b>			
FM			
Input Signal	0V ~ 2V.		
Signal Period	10msec ~ 5sec.		
Input Impedance	100 K Ohms.		
Frequency Off-set range	0 ~ 5%.		
AM			
Input Signal	0V ~ 2V.		
Signal Period	10msec ~ 5sec.		
Input Impedance	100 K Ohms.		
Frequency Off-set Range	0 ~ 5%.		
<b>Frequency Counter</b>			
Display	8 Digit.		
Frequency Range	0.2Hz ~ 100000KHz.		
Sensitivity	50mV ~ 2V (10Hz ~ 20MHz), 100mV ~ 2V (0.2Hz ~ 10Hz and 20MHz ~ 100MHz).		
Input Impedance	500K Ohms // 30 pF.		
Wave-Form	Sine / Square.		
Measurement Time	1 Period for Freq. <10Hz and 0.1s for Freq. > 10Hz.		
Time Base	10 MHz. Stability $\pm$ 5 x 10 <sup>-5</sup> /day.		
Measurement Error	Time-Base Error $\pm$ Trigger Error (0.3% for S/N ratio better than 40dB).		
HF Filter	Above 100KHz.		
<b>General</b>			
Interface (Optional)	RS232, USB		
Power Supply	220V $\pm$ 10%, 50Hz, <30VA.		
Size and Weight	250 (D) x 235(W) x 90 (H) mm, 3.5Kg.		
Operating Temperature	0 deg ~ 40 deg.		
Standard Accessories	Mains Cord, 1 No. BNC-BNC, BNC to Crocodile, Instruction Manual.		
Optional Accessories	50 Ohms Termination, RS232 Cable.		

**Aplab** Test & Measurement Instruments Division

Aplab Limited, A-5, Wagle Estate, Thane 400 604. India. Tel. : 91-22-67395555, 25821861 Fax : 25823137 Email : tmsales@aplab.com

•AGRA •AHMEDABAD •BANGALORE •CHANDIGARH •CHENNAI •COIMBATORE •INDORE •JAIPUR •KOLKATA •LUCKNOW •MUMBAI •NEW DELHI •PUNE •SECUNDERABAD •THIRUVANANTHAPURAM

www.aplab.com